


CD060B3H SERIES

- Size : $\phi 60\text{mm}$
- Housing / Impeller : Aluminum / Aluminum
- Motor : DC Brushless 3-Phase Motor
- Operating Temperature : $0^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- Insulation : Class A



Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise (dB(A))	Weight (Kg)
	A	B	C								
CD06030V24B3HWM	310	325	370	24	0.53	12.72	2650	117	2.5	45	0.95
CD06036V24B3HWM	370	385	430	24	0.58	13.92	2600	139	2.5	45	1.00
CD06042V24B3HWM	430	445	490	24	0.63	15.12	2550	163	2.4	44	1.10
CD06052V24B3HWM	530	545	590	24	0.69	16.56	2450	198	2.3	43	1.25
CD06060V24B3HWM	610	625	670	24	0.73	17.52	2400	219	2.3	43	1.35
CD06070V24B3HWM	710	725	770	24	0.79	18.96	2350	244	2.2	42	1.45
CD0604242V24HWM (Double Fan)	870	885	953	24	0.86	20.64	2350	290	2.2	42	1.90

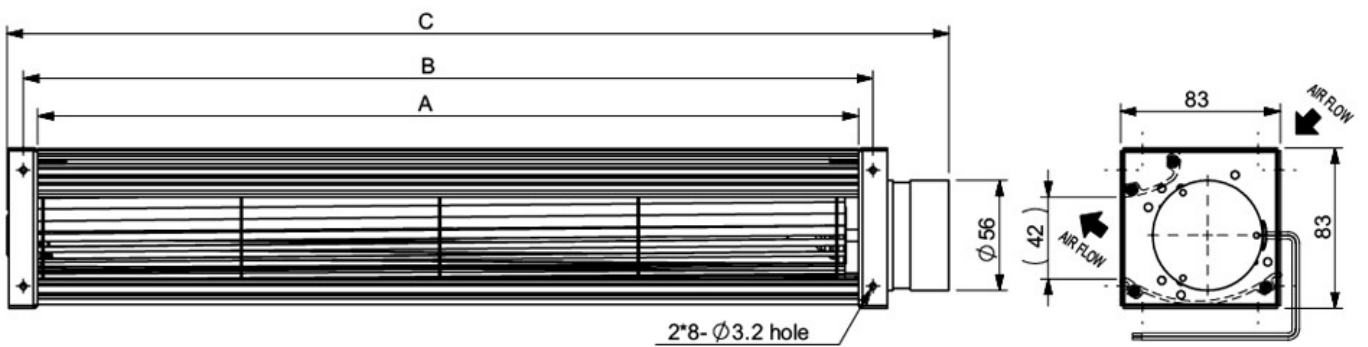